




EIZO®

Security and Surveillance Monitor Solutions




EIZO Security and Surveillance Monitor Solutions

EIZO's security and surveillance monitor solutions meet the needs of a wide range of applications. Many of our products are built for 24-hour use to provide reliability and peace of mind for various environments including transportation hubs, medical facilities, businesses, government offices, and more.

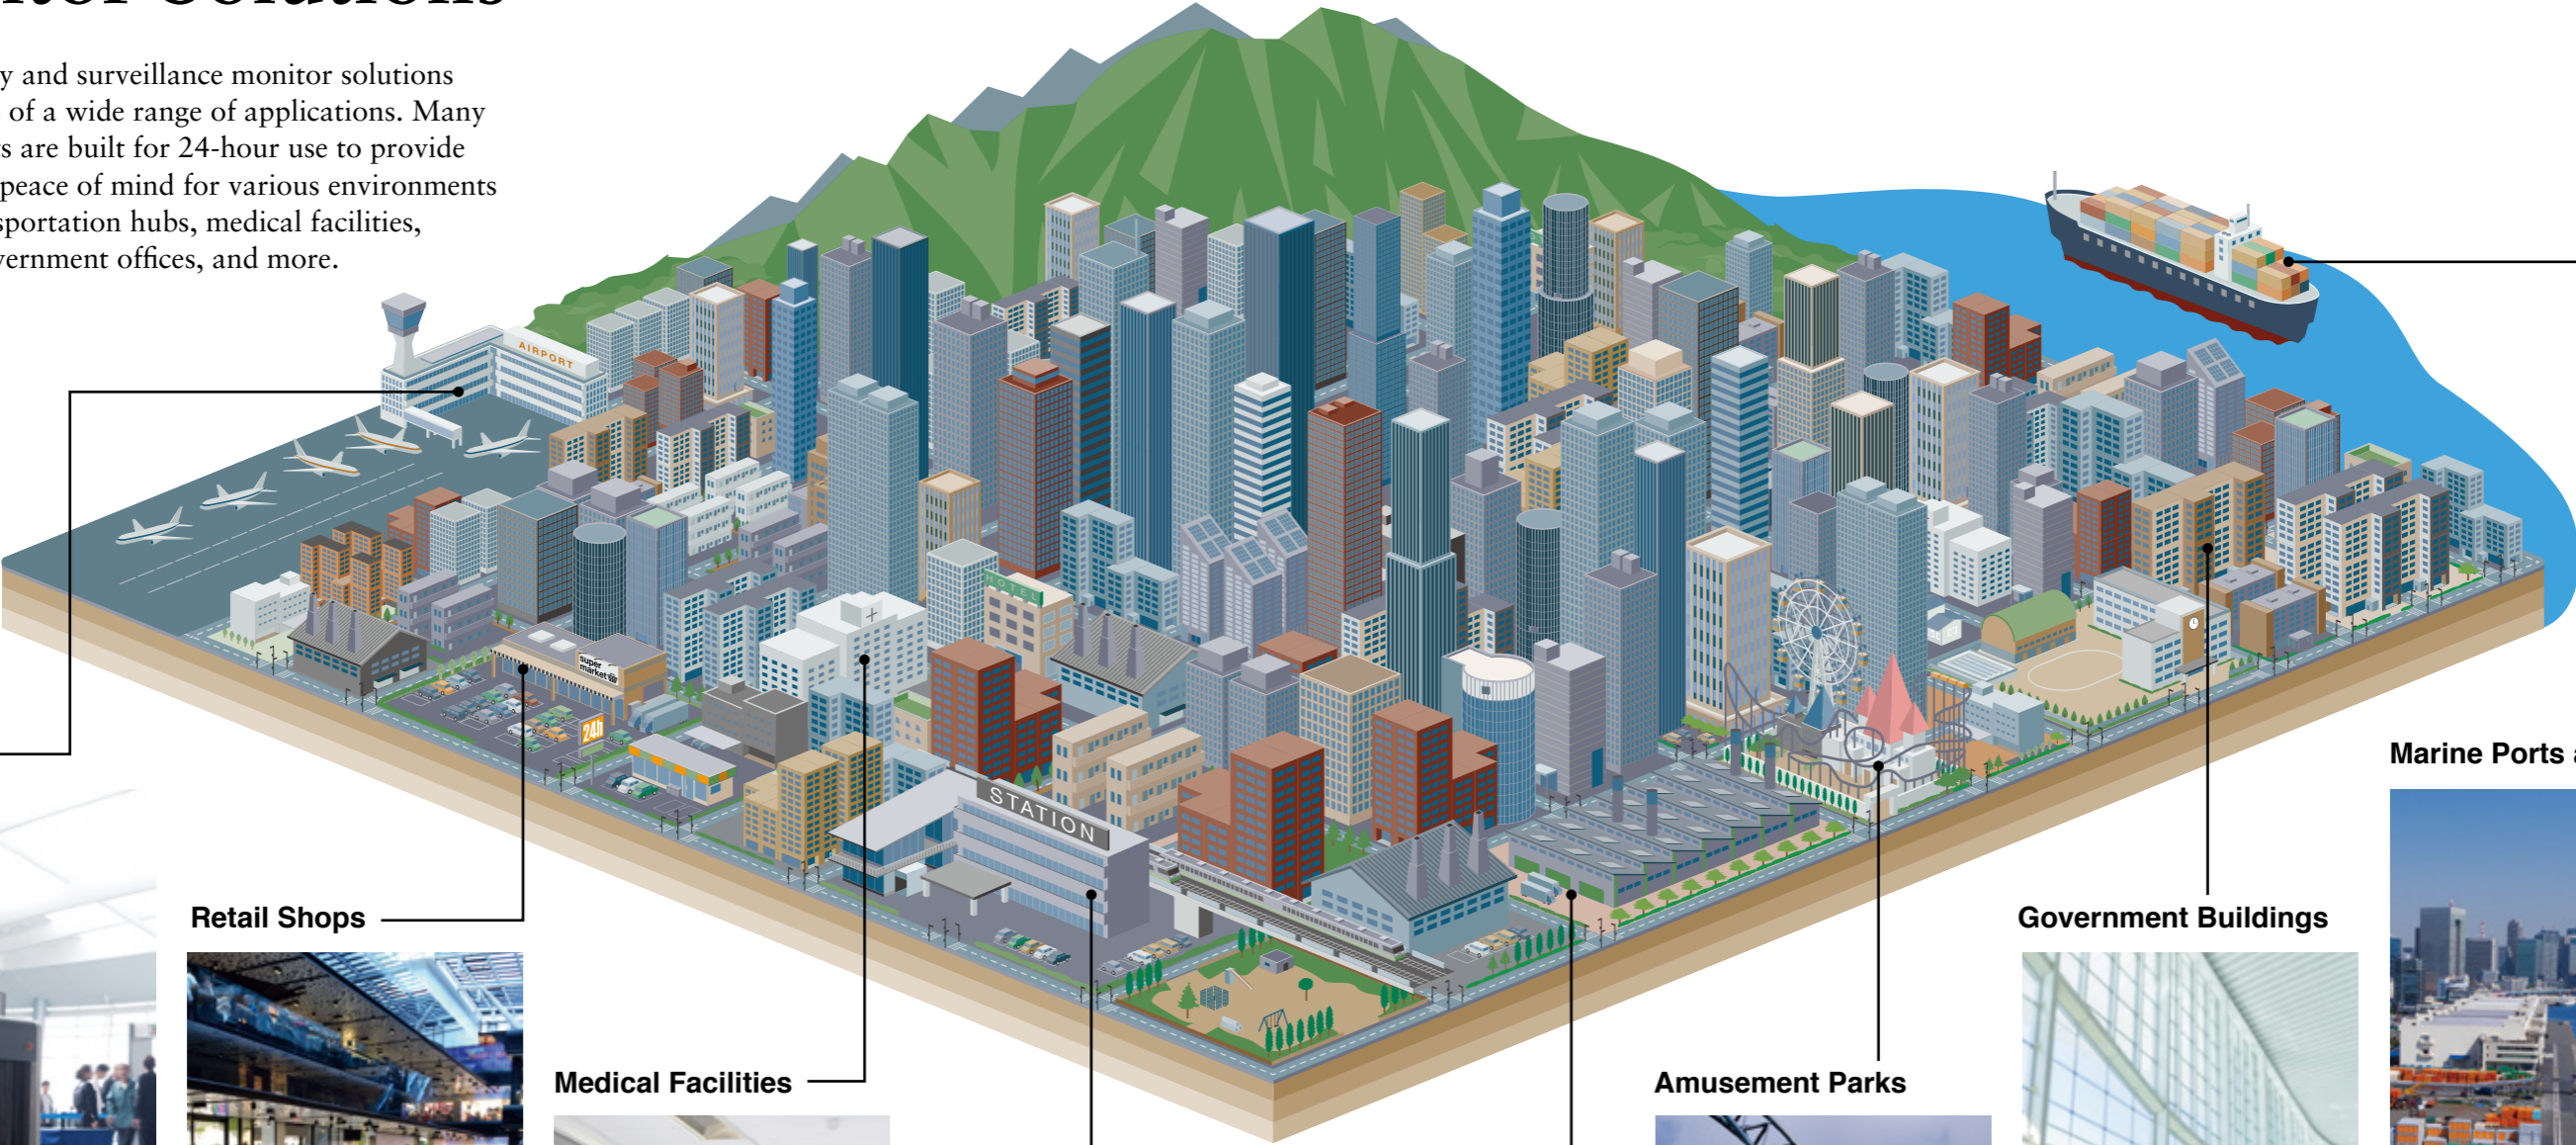

Airports

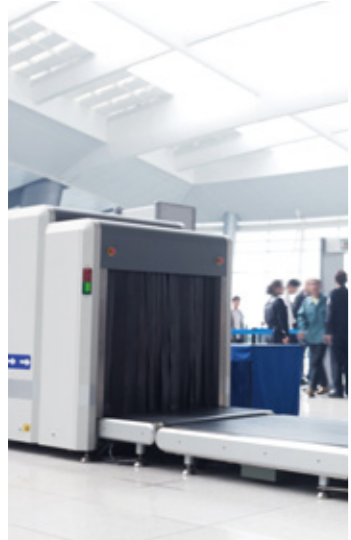

Retail Shops



Medical Facilities



Railways



Factories




Amusement Parks



Government Buildings



Marine Ports and Ships

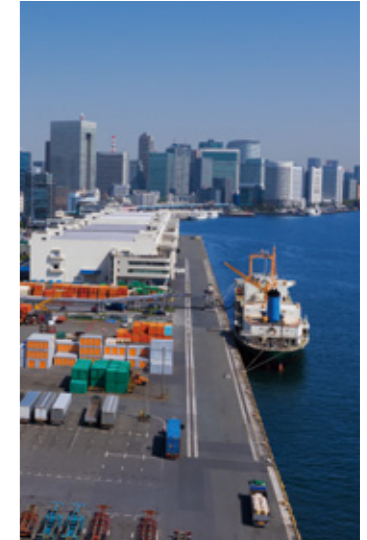

IP Decoding Monitors

With hassle-free installation, efficient video management, and exceptional visibility and performance, these full HD (1920 × 1080) monitors are built specifically for IP security camera connection and management.



DuraVision
FDF4627W-IP

24/7 Use LED Backlight Remote Control 1920 × 1080 Non-glare Panel


46"



DuraVision
FDF2304W-IP

24/7 Use LED Backlight Remote Control 1920 × 1080 Non-glare Panel Flicker-Free

23"

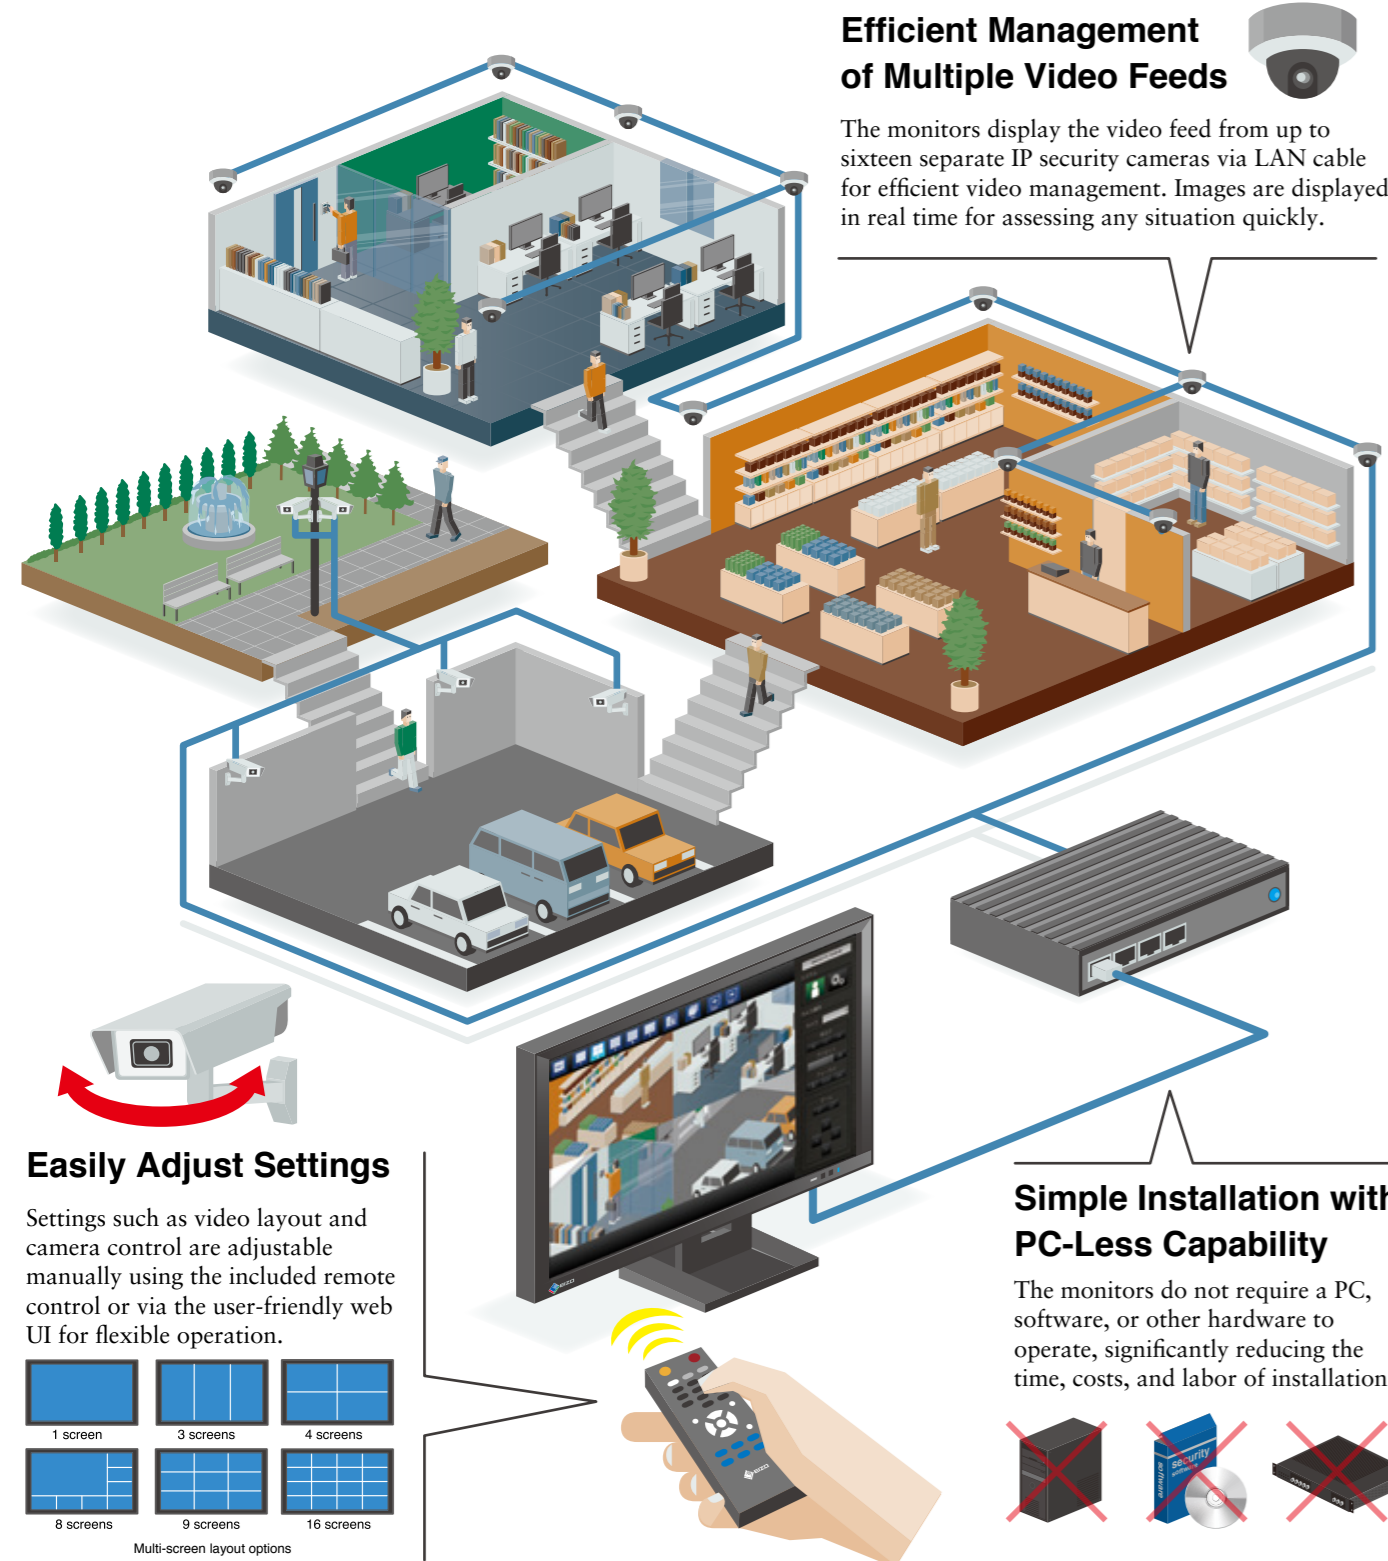


High Performance Decoding Technology

The monitors come equipped with decoding technology to ensure that images are displayed with no delay and are true to the original source data. This eliminates the need for an additional decoder.

Efficient Video Management on a Large Screen

The DuraVision FDF4627W-IP provides ample space across its large 46-inch screen for clearly viewing multiple video feeds at once.

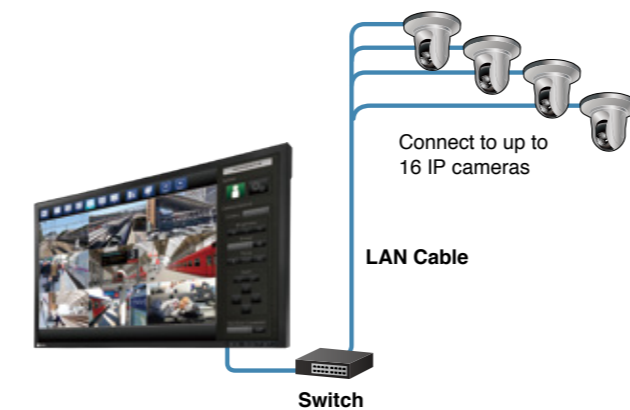


Secure Investment with Wide Range of Camera Support

Both monitors support cameras with ONVIF Profile S for flexibility of installation and ensured interoperability with a wide range of products. In addition, they support Axis (VAPIX) and Panasonic camera protocols for further usability.

See www.eizo.com/global/compat/ip-camera for camera compatibility information.

Customizable Event Response to VMS

The web API of both monitors supports customizable integration with the local video management system (VMS). This allows operators to assign a specific response from the monitor to automatically occur based on a preset time schedule or when a particular event takes place. In addition, a direct connection through RTSP is available (Direct URI).

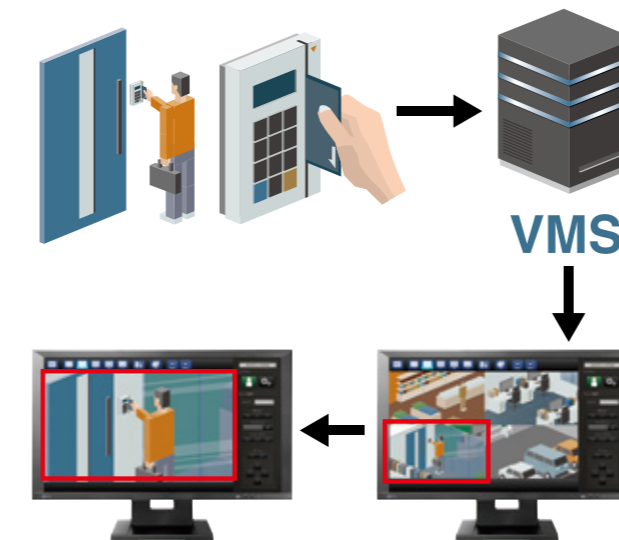

Example: Automatic screen layout adjustment in response to key card usage.

Excellent Readability

The DuraVision FDF4627W-IP's high brightness of 700 cd/m² and 4000:1 contrast ratio offer excellent readability in changing ambient lighting conditions. The DuraVision FDF2304W-IP's wide dimming range of 3 cd/m² up to 300 cd/m² allows you to adjust to the appropriate brightness level for viewing in dim or changing ambient lighting conditions.


Noise Reduction

The monitors include settings to reduce the amount of block noise that occurs due to video compression.

Visibility Enhancement

EIZO's unique Visibility Optimizer technology includes a number of functions for improving the clarity of images. Low-Light Correction automatically detects and adjusts dark areas of the screen, brightening images while reproducing them with a realistic sense of depth. Outline Enhancer blur-reduction technology analyzes the displayed content and ensures noise is not accentuated while correcting blurred areas.

Low-Light Correction

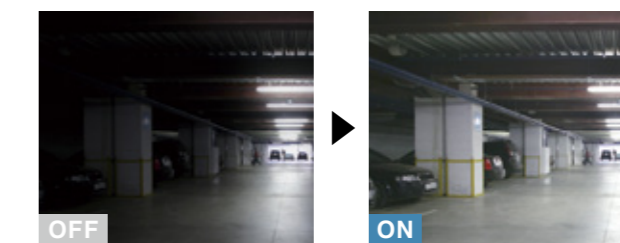

Outline Enhancer



Smooth Gradations

The monitors reproduce smooth images by converting an 8-bit input signal to 10 bits within the monitor and selecting the optimum color values from a 10-bit LUT. The optimized data is then converted back to an 8-bit output signal, resulting in smoother gradations.

Gradation Scale without Adjustment




Gradation Scale After Adjustment



Simple VESA Installation

The DuraVision FDF4627W-IP comes standard as VESA mount and the FDF2304W-IP can be configured with or without a stand. Since both monitors operate without a PC, the installation area is kept free of excess cabling and allows for more flexible positioning.

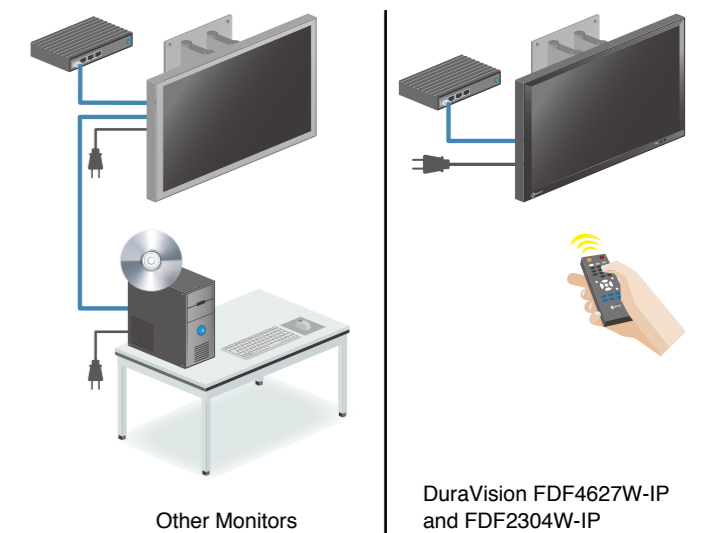

Clear Video Reproduction

The DuraVision FDF2304W-IP's overdrive circuit accelerates gray-to-gray response time to just 8 ms. This minimizes ghosting and blurring during high motion video capture for clear video reproduction.



Case Study: Walibi Holland Amusement Park

Walibi Holland uses DuraVision IP decoding monitors for reliable 24/7 amusement park surveillance. EIZO had the opportunity to speak with them about how they feel about the products.

"We use cameras for almost all our attractions to ensure good surveillance and to allow our employees to quickly take action if necessary. The video images of the attractions are usually displayed on-site via a VMS system. For this, standard computer monitors are used which, in their turn, are connected to a PC. Displaying video images on a monitor thus requires a fair number of components.



The EIZO IP decoding monitor enables us to display IP video images directly on this monitor in a very quick and effective manner, without the use of a PC. Moreover, installation is much faster and easier and the images displayed are far sharper and more natural than on the monitors used previously."



"Previously, we needed a lot of servers in order to gather the camera images and display them on a monitor. Now it is simply a matter of plug and play. Put the network plug into the monitor, configure, and the system is operational. No other screen is available that can support both functions. EIZO is the only manufacturer able to provide us with this solution."



"This FDF2304W-IP decoding monitor solution provides us with huge flexibility when displaying the various IP video images. Installation is very quick and saves us a lot of time. Moreover, the images are very sharp and displayed in realistic colors, which provides the operator with a clear image. This is very important when monitoring an attraction."

"No other screen is available that can support both functions. EIZO is the only manufacturer able to provide us with this solution."

About Walibi Holland

Walibi Holland is an amusement park in Biddinghuizen. The park opened in 1971 under the name Flevohof. Today it is one of the larger amusement parks in the Netherlands, and is part of parent company Compagnie des Alpes. It welcomed 900,000 visitors in 2015. Walibi offers its visitors a total of 35 attractions in a beautiful setting.

Visibility Enhancement Monitors

The DuraVision FDF2306W and FDF2305W are two full HD (1920 × 1080) monitors equipped with visibility-enhancement technology for improving the clarity of security video footage in real time.



DuraVision
FDF2306W



DuraVision
FDF2305W

24/7 Use LED Backlight Remote Control HDMI x 2 1920 x 1080

Visibility Optimizer for Clear Images



1

Defog

The DuraVision FDF2306W's defog function enhances images that are affected by fog, snow, or other environmental factors that cause the video to appear hazy or unclear.

2

Low-Light Correction

Low-Light Correction detects areas of the screen that are dark and difficult to see and adjusts the brightness of each pixel. This reproduces highly visible images with a realistic sense of depth by brightening dark areas while keeping lighter areas from becoming washed out.

Equivalent technology for FDF2305W is called Smart Insight.



3

Outline Enhancer

Outline Enhancer analyzes the displayed content and ensures that noise is not accentuated while correcting blurred areas for a sharper, clearer image. For images with a great deal of depth, it sharpens the foreground more strongly to maintain a real-world sense of focus.

Equivalent technology for FDF2305W is called Smart Resolution.


Smooth Gradations

The monitor reproduces smooth images by converting an 8-bit input signal to 10 bits within the monitor and selecting the optimum color values from a 10-bit LUT (look-up table). The optimized data is then converted back to an 8-bit output signal, resulting in smoother gradations.


FDF2305W / FDF2306W




Gamma Curve



Other Monitors



Gamma Curve



Clear View from Below

For environments where the monitor is placed above eye level, the FDF2306W includes a function called Up View that minimizes color washout that may occur from viewing an LCD screen from below.

FDF2306W



Other Monitors



Multi-Monitor Configuration

The FlexScan EV2450 is a 23.8-inch full HD (1920 × 1080) monitor that combines reduced power consumption and improved visual ergonomics inside an extremely compact cabinet for multi-monitor environments.



FlexScan® EV2450
LED Backlight **1920 × 1080** **Non-glare IPS** **Flicker-Free**

4K Resolution Monitor

The FlexScan EV3237 is a 31.5-inch 4K IPS monitor with 3840 × 2160 native resolution that offers a streamlined viewing experience with more information displayed on a single screen instead of across multiple monitors.



FlexScan® EV3237
LED Backlight **4K Resolution** **Non-glare IPS** **Flicker-Free**

World's Thinnest Bezels for Multi-Monitor Environments

The monitor features 1 mm ultra-slim bezels on the sides and top with black borders of 4.3 mm and a depth of a mere 47.9 mm. This makes for an attractive design that blends in with the desktop and reduces eye movement in a multi-monitor setup.



Flicker-Free for Reduced Eye Fatigue

The FlexScan EV Series monitors utilize a hybrid solution to regulate brightness and make flicker unperceivable without compromising color stability. In a comparison test conducted by EIZO, the FlexScan EV2450 on average reduced flicker by more than 74% compared to LED-backlit monitors from other manufacturers.



Visual Ergonomics

Auto brightness control detects changes in ambient lighting and adjusts the screen to the ideal brightness level. The monitor is also adjustable to less than 1% of maximum brightness for a comfortable working environment.



Convenient Multitasking with PbyP / PinP

Picture by Picture (PbyP) is a feature that allows you to view data from multiple signal sources on a single screen simultaneously. Picture in Picture (PinP) allows you to display a small separate screen from a second signal source within the monitor.



Streamline Your Workflow

Display 3840 × 2160 resolution data in full on one screen without the obtrusive bezels found in typical multi-monitor workstations. This allows controllers and security personnel to view more information easily in one place instead of across multiple monitors.

Smooth Gradations

The monitor reproduces smooth images by converting an 8-bit input signal to 10 bits within the monitor and selecting the optimum color values from a 10-bit LUT (look-up table). The optimized data is then converted back to an 8-bit output signal, resulting in smoother gradations.

FlexScan® Lineup

EIZO's extensive range of FlexScan monitors offer a multitude of feature sets that meet the diverse requirements of any security and surveillance environment. A range of sizes from 15 to 31.5 inches and resolutions of up to 4K UHD are available.



Case Study: Port of Antwerp

The port of Antwerp is one of the biggest in the world, situated on the river Scheldt. The highly complex logistical network of the harbor is laid out on several monitors that visualize high resolution IP cameras, maps, and flowcharts. The multi-functional EV3237 proved to be capable of showing all sorts of images in a very precise way and it offers unequalled reliability.



Analog Input Monitors

The 1280 × 1024 resolution DuraVision FDS1903 and FDS1703 offer PC and composite (BNC) inputs, high image quality, and long-term reliability.



DuraVision®
FDS1903




DuraVision®
FDS1703



Complete Connection

Both monitors are equipped with an analog D-sub mini 15-pin input for connection to a PC and a composite (BNC) input for connection to video surveillance equipment such as close-circuit televisions (CCTV) and security cameras. They also support NTSC, PAL, and SECAM signals.

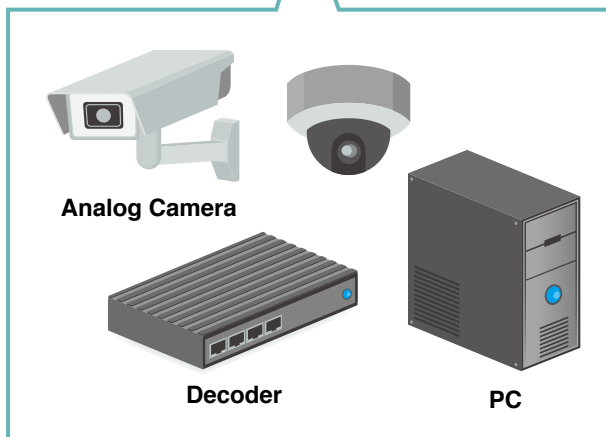

Flexible Display Options with Underscan and Overscan

Underscan is an option that shows 100% of an image and is ideal for video. Overscan displays approximately 95% of an image, eliminating extraneous TV broadcasting data that sometimes appears at the edges of the screen.



Reduced Noise for High Image Quality

To reduce ghosting and flicker, the video input has a Y/C separation circuit which separates the brightness signal (Y) from the color information signal (C), minimizing noise in the images on screen.

Clear View from Below

For environments where the monitor is placed above eye level, the DuraVision FDS1903 includes a function called Up View that minimizes color washout that may occur from viewing an LCD screen from below.

Touch Panel Monitors

The DuraVision FDF2382WT and FDS1782T are two monitors with projected capacitive touch technology. They offer a seamless touch experience with a highly durable screen for a range of markets.



DuraVision
FDF2382WT

10-point multitouch
LED Backlight
Non-glare IPS

23"




DuraVision
FDS1782T

10-point multitouch
LED Backlight
Non-glare IPS

17"

Projected Capacitive Touch Panel


The DuraVision FDF2382WT and FDS1782T feature projected capacitive (PCAP) touch technology which is more durable and reliable compared to other touch technologies. Both monitors accept touch input from a bare finger or dedicated stylus.

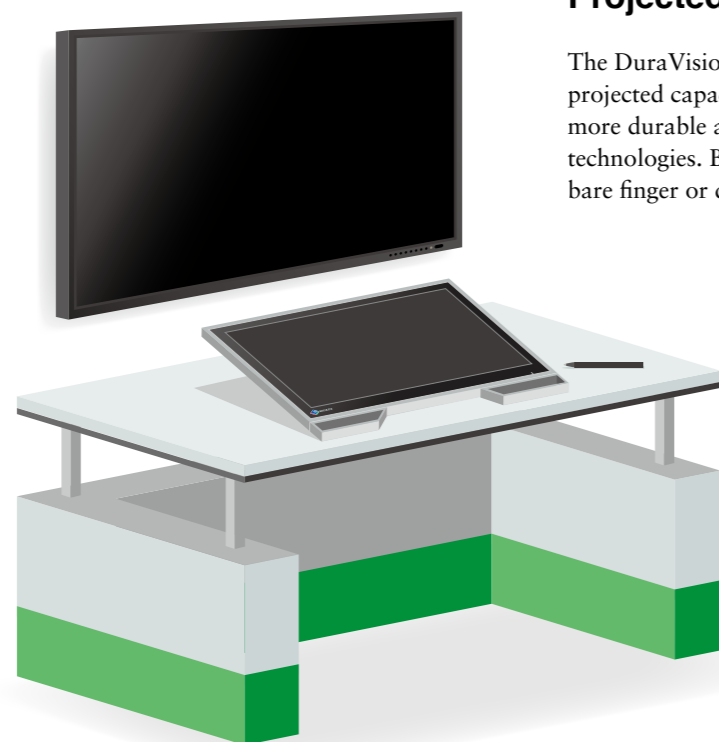

Multitouch Interface

The screens can detect up to 10 simultaneous touches so you can easily operate a variety of applications in almost any environment. Furthermore, compared to 5-point multitouch the screen has higher touch sensitivity, making writing with a finger or stylus smoother. The monitors are equipped with palm rejection technology which allows you to rest your hand directly on the screen without causing any unintended touch input.

Palm rejection minimum activation area is 2 x 2 cm.

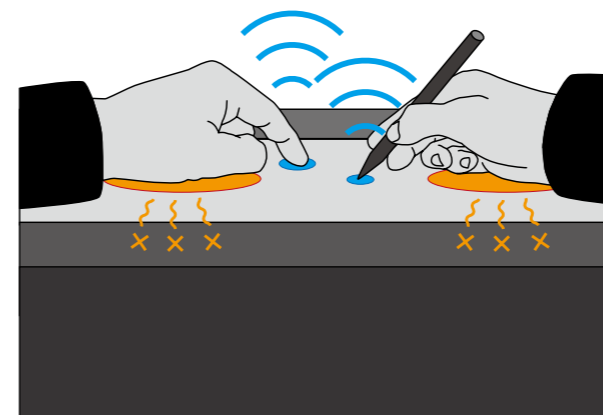

IPS Panel

The monitors use an LED-backlit IPS panel with wide viewing angles that minimize color shift and contrast changes when viewing the screen at an angle. The surface of the panel is also coated with an anti-glare treatment for further clarity in bright ambient environments.



Narrow viewing angles

Wide viewing angles

Touch Detection Control

Users can easily turn touch detection on or off by pushing the button conveniently located on the monitor's side.



Fully Flat Design

The fully flat surface provides a seamless touch experience to the edges of the screen. This makes swiping motions and scrolling a breeze.




Sensitivity Calibration

The monitors are equipped with technology which calibrates the touch sensitivity to minimize incorrect touch response due to environmental factors and electromagnetic noise. This ensures that the screen maintains accurate touch interaction during use.

Reclining Stand

The equipped stand provides flexible positioning to allow the monitor to rest on your desk like a notebook PC and reclines back to the desired angle. This makes it easy to place the monitor in the ideal position for flexible use.

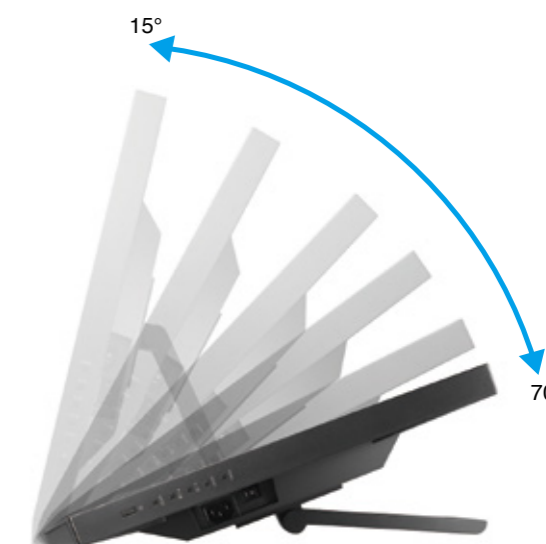

Innovative Technology

Comprehensive Solutions

Visual Technology Company



Global Reach

EIZO products are highly regarded in many specialty fields throughout the world because of their accurate and stable image display. EIZO is based in Japan and is represented in over 80 countries by a network of group companies and exclusive distributors.

45+ years of expertise

45+ years of expertise

With over 45 years of technical expertise, EIZO is dedicated to developing innovative and high quality visual display solutions.



Integrated Production

To incorporate the latest technologies in our products, we follow a unique in-house research and development production model, including the production of our own printed circuit boards (PCBs).



Manufacturing

Our in-house manufacturing combines manual and automated operations to ensure high quality products are made as efficiently as possible.



Integrated Approach


Customization

We offer extensive customization for select monitors to meet the diverse requirements of various markets, including mission-critical fields such as maritime and air traffic control.




Quality Control

We use our own anechoic chambers to confirm that our products comply with international regulations covering electromagnetic interference (EMI) and susceptibility. We also conduct long-life testing where our monitors are kept powered on for thousands of hours and their image quality is checked regularly.



Video Management Solutions

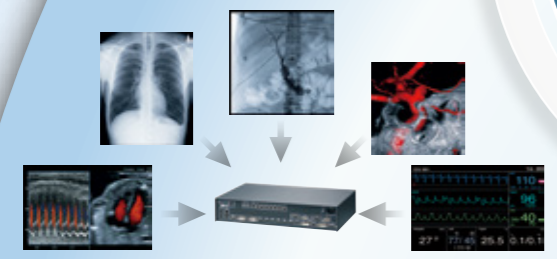


EIZO's Large Monitor Managers gather various video inputs and display them on a large screen. Different layouts can be arranged according to user preference and work environment for a streamlined workflow.

Visibility-Enhancing Technology




EIZO's Visibility Optimizer technology includes three functions for improving image clarity in security environments. Defog enhances images that appear hazy due to fog or snow. Low-Light Correction detects areas of the screen that are too dark and adjusts the brightness of each pixel. Outline Enhancer ensures noise is not accentuated while correcting blurred areas.

IP Decoding Monitors

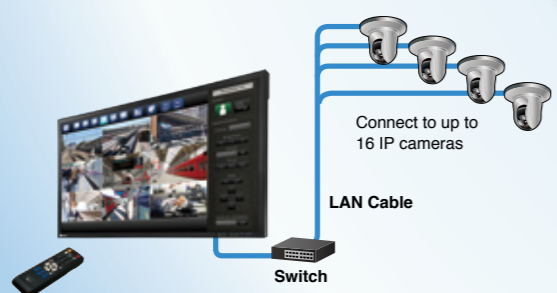

EIZO's IP solutions offer PC-less connection to multiple IP cameras for efficient video management in security and surveillance environments.

In-House Optical Bonding

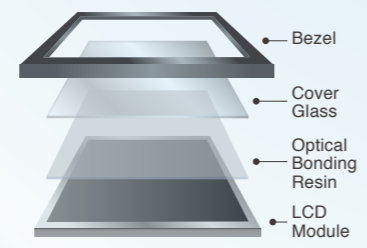

EIZO has an in-house production line for optical bonding which allows the company to continue to meet the needs of professionals while ensuring each product maintains high quality standards.



Business Enterprise

FlexScan


The FlexScan Series of monitors offer a range of features for reducing eye fatigue and improving image clarity for the office, schools, or home use.



Graphics

ColorEdge

ColorEdge is a series of color management monitors and software solutions that provides users in photography, design, post production, and other fields faithful color reproduction, ease-of-use, and reliability for expressing their creative vision.

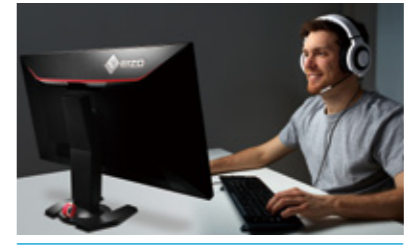

Home Entertainment

FORIS

FORIS, which means "door" in Latin, is EIZO's line of monitors for gaming, watching videos, enjoying digital photos, and more. With unique features such as smartphone notifications, FORIS provides users with an immersive experience.



Healthcare

CuratOR / RadiForce

With CuratOR, EIZO offers complete solutions for the integrated OR, interventional radiology, and the control room. RadiForce medical monitors are designed for displaying medical images faithfully using cutting edge technology and unique features.



Maritime / Security & Surveillance

DuraVision







DuraVision monitors offer robust performance and reliable 24/7 operation to maritime, security & surveillance, and industrial markets. The monitors are highly configurable for flexible installation in a range of environments.



Air Traffic Control

Raptor / Re/Vue

EIZO provides air traffic control centers, towers, and training & simulation facilities with the most extensive lineup of monitors, recording & streaming solutions, and graphics boards in the industry. Extensive customizability is also offered for meeting the needs of any installation.

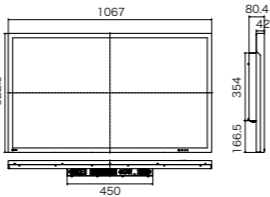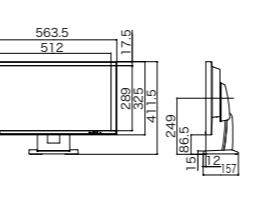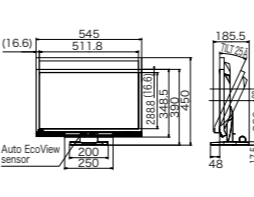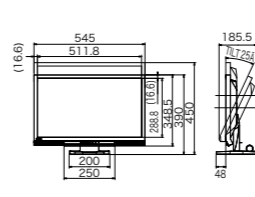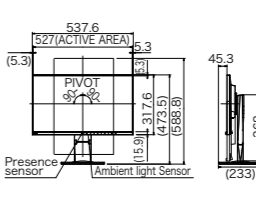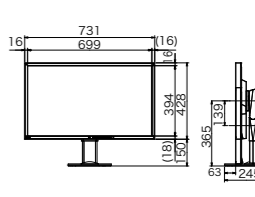		IP Decoding Monitors		Visibility Enhancement Monitors		Multi-Monitor Configuration		4K Resolution Monitor	
		DuraVision FDF4627W-IP	DuraVision FDF2304W-IP	DuraVision FDF2306W	DuraVision FDF2305W	FlexScan EV2450	FlexScan EV3237		
Panel	Type	VA	IPS	TN	TN	IPS	IPS		
	Backlight	LED	LED	LED	LED	LED	LED		
	Size	46" / 116.8 cm	23" / 58 cm	23" / 58 cm	23" / 58 cm	23.8" / 60.4 cm	31.5" / 80 cm		
	Native Resolution	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080	DisplayPort: 3840 x 2160 (60 Hz, 16:9 aspect ratio) DVI / HDMI: 3840 x 2160 (30 Hz, 16:9 aspect ratio)	
	Viewable Image Size (H x V)	1018.1 x 572.7 mm	509.1 x 286.4 mm	509.7 x 286.7 mm	509.7 x 286.7 mm	527 x 296.4 mm	696.9 x 392 mm		
	Pixel Pitch	0.530 x 0.530 mm	0.265 x 0.265 mm	0.266 x 0.266 mm	0.266 x 0.266 mm	0.274 x 0.274 mm	0.181 x 0.181 mm		
	Grayscale Tones	256 tones (a palette of 1021)	256 tones (a palette of 1021)	256 tones (a palette of 1021)	256 tones (a palette of 1021)	256 tones (a palette of 1021)	256 tones (a palette of 1021)	256 tones (a palette of 1021)	
	Display Colors	16.7 million (a palette of 1.06 billion)	16.7 million (a palette of 1.06 billion)	16.7 million (a palette of 1.06 billion)	16.7 million (a palette of 1.06 billion)	16.7 million (a palette of 1.06 billion)	16.7 million (a palette of 1.06 billion)	16.7 million (a palette of 1.06 billion)	
	Viewing Angles (H / V, typical)	178°, 178°	178°, 178°	170°, 160°	170°, 160°	178°, 178°	178°, 178°	178°, 178°	
	Brightness (typical)	700 cd/m ²	300 cd/m ²	250 cd/m ²	250 cd/m ²	250 cd/m ²	300 cd/m ²	300 cd/m ²	
Contrast Ratio (typical)	4000:1	1000:1	1000:1 (5000:1 with ContrastEnhancer)	1000:1 (5000:1 with ContrastEnhancer)	1000:1	1000:1	1000:1		
Response Time (typical)	6.5 ms (gray-to-gray)	8 ms (gray-to-gray)	10 ms (black-white-black)	10 ms (black-white-black)	5 ms (gray-to-gray)	5 ms (gray-to-gray)			
Video Signals	Input Terminals	IP Camera: RJ-45 PC / AV: HDMI	IP Camera: RJ-45 PC / AV: HDMI	PC: DVI-D 24 pin (with HDCP), D-Sub mini 15 pin PC / AV: HDMI x 2	PC: DVI-D 24 pin (with HDCP), D-Sub mini 15 pin PC / AV: HDMI x 2	D-Sub mini 15 pin, DVI-D 24 pin (with HDCP), HDMI (with HDCP), DisplayPort (with HDCP)	DisplayPort 1.2 x 2 (with HDCP 1.x ³), DVI-D 24 pin (with HDCP 1.x ³), HDMI (with HDCP 1.x ³).		
	Digital Scanning Frequency (H / V)	HDMI: 31 - 68 kHz / 49 - 61 Hz (VGA Text: 69 - 71 Hz)	HDMI: 31 - 68 kHz / 49 - 61 Hz (VGA Text: 69 - 71 Hz)	HDMI: 15 - 68 kHz / 49 - 61 Hz (VGA Text: 69 - 71 Hz), DVI: 31 - 68 kHz, 59 - 61 Hz (VGA Text: 69 - 71 Hz)	HDMI: 15 - 68 kHz / 49 - 61 Hz (VGA Text: 69 - 71 Hz), DVI: 31 - 68 kHz, 59 - 61 Hz (VGA Text: 69 - 71 Hz)	DVI: 31 - 68 kHz, 59 - 61 Hz DisplayPort: 31 - 68 kHz, 59 - 61 Hz HDMI: 15 - 68 kHz, 49 - 61 Hz	31 - 134 kHz, 29 - 31 Hz and 59 - 61 Hz		
	Analog Scanning Frequency (H / V)	-	-	PC: 31 - 81 kHz, 55 - 76 Hz AV: N/A	PC: 31 - 81 kHz, 55 - 76 Hz AV: N/A	31 - 81 kHz, 55 - 76 Hz	-		
	Sync Formats	-	-	PC: Separate AV: N/A	PC: Separate AV: N/A	Separate	-		
	Video Input Format	-	-	-	-	-	-		
USB	Function	USB ("A" Receptacle) x 2	USB ("A" Receptacle) x 2	-	-	1 port for monitor control 2-port USB hub	1 port for upstream 3-port USB hub (including 1 USB battery charge port)		
	Standard	USB 2.0	USB 2.0	-	-	USB 3.0	USB 3.0, USB BC 1.2		
Audio	Speakers	-	-	0.5 W + 0.5 W (stereo)	0.5 W + 0.5 W (stereo)	1.0 W + 1.0 W	1.0 W + 1.0 W		
	Input Terminals	-	-	PC: 3.5 mm stereo jack PC / AV: HDMI x 2	PC: 3.5 mm stereo jack PC / AV: HDMI x 2	3.5 mm stereo jack	3.5 mm stereo jack		
	Output Terminals	-	-	3.5 mm stereo jack, 3.5 mm headphone jack	3.5 mm stereo jack, 3.5 mm headphone jack	3.5 mm headphone jack	3.5 mm headphone jack		
Power	Sound Adjustment	-	-	Volume, Mute, Sound Level, Source (HDMI)	Volume, Mute, Sound Level, Source (HDMI)	Volume, Source (DisplayPort, HDMI)	Volume, Source (DisplayPort, HDMI)		
	Power Requirements	AC 100 - 120 V / AC 200 -240 V, 50 / 60 Hz	AC 100 - 120 V / AC 200 -240 V, 50 / 60 Hz	AC 100 - 120 V / AC 200 -240 V, 50 / 60 Hz	AC 100 - 120 V / AC 200 -240 V, 50 / 60 Hz	AC 100 - 120 V / 200 - 240 V, 50 / 60 Hz	AC 100 - 120 V / 200 - 240 V, 50 / 60 Hz		
	Maximum Power Consumption	120 W	61 W	38 W	37 W	44 W	105 W		
	Typical Power Consumption	-	-	19 W	18 W	11 W	30 W		
	Power Save Mode	-	-	Less than 0.4 W	Less than 0.4 W	Less than 0.3 W	Less than 0.5 W		
	Standby Mode	Less than 6 W (Quick start OFF) Less than 26 W (Quick start ON)	Less than 3 W (Quick start OFF) Less than 33 W (Quick start ON)	Less than 0.3 W	Less than 0.3 W	-	-		
Power Management	-	-	DVI DMPM, VESA DPM	DVI DMPM, VESA DPM	Power Save (VESA DPM, DisplayPort Rev. 1.1a, and DVI DMPM), Eco Timer	Power Save (VESA DPM, DisplayPort Rev. 1.1a, and DVI DMPM), Eco Timer			
Features & Functions	Preset Modes	Day, Night	Day, Night	User1, User2, sRGB	Day, Night, sRGB	Paper, Movie, sRGB, User1, User2, DICOM	Paper, Movie, sRGB, User1, User2, DICOM		
	Auto EcoView	-	-	Yes (Default: Disabled)	Yes (Default: Disabled)	Yes	Yes		
	Visibility Enhancement Technology	Visibility Optimizer (Low-Light Correction, Outline Enhancer, Noise Reduction)	Visibility Optimizer (Low-Light Correction, Outline Enhancer, Noise Reduction)	Visibility Optimizer (Low-Light Correction, Defog, Auto Fog Detection, Outline Enhancer, Skin Tone Detection, Text Detection, Noise Reduction)	Smart Insight, Smart Resolution, Smart Detection, Skin Tone Enhancer, Text Enhancer	-	-		
Physical Specifications	Dimensions (Landscape, W x H x D)	-	563.5 x 411.5 x 157 mm	545 x 390 - 450 x 200 mm	545 x 390 - 450 x 200 mm	537.6 x 368 - 473.5 x 233 mm	731 x 439 - 578 x 245 mm		
	Dimensions (Portrait, W x H x D)	-	-	-	-	317.6 x 547.6 - 588.8 x 233 mm	-		
	Dimensions (Without Stand, W x H x D)	1067 x 622.5 x 80.4 mm	563.5 x 325 x 63 mm	545 x 348.5 x 54 mm	545 x 348.5 x 54 mm	537.6 x 317.6 x 47.9 mm	731 x 428 x 59.5 mm		
	Net Weight	-	7.2 kg / 15.9 lbs	5.2 kg / 11.5 lbs	5.2 kg / 11.5 lbs	6.2 kg / 13.7 lbs	10.6 kg / 23.4 lbs		
	Net Weight (Without Stand)	19.6 kg / 43.2 lbs	4.8 kg / 10.6 lbs	3.9 kg / 8.6 lbs	3.9 kg / 8.6 lbs	3.8 kg / 8.4 lbs	7.8 kg / 17.2 lbs		
	Height Adjustment Range	-	-	60 mm	60 mm	140 mm	139 mm		
	Tilt	-	30° Up, 0° Down	25° Up, 0° Down	25° Up, 0° Down	35° Up, 5° Down	35° Up, 5° Down		
	Swivel	-	-	344°	344°	344°	344°		
	Pivot	-	-	-	-	90° (both clockwise and counter clockwise)	-		
Environmental Requirements	Hole Spacing (VESA Standard)	400 x 100 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm		
	Temperature	0 - 40 °C	0 - 35 °C	5 - 35 °C	5 - 35 °C	5 - 35 °C	5 - 35 °C		
	Humidity (R.H., non condensing)	20 - 80%	20 - 80%	20 - 80%	20 - 80%	20 - 80%	20 - 80%		
Certifications & Standards (Please contact EIZO for the latest information.)		CB, CE, UL/cUL, FCC-A, Canadian ICES-003-A, VCCI-A, CCC, RoHS, WEEE, China RoHS	CB, CE, cTUVus, FCC-B, Canadian ICES-003-B, TUV/S, PSE, VCCI-B, CCC, EAC, RCM, RoHS, WEEE	CB, CE, cTUVus, FCC-B, Canadian ICES-003-B, TUV/S, PSE, VCCI-B, CCC, EAC, RCM, RoHS, WEEE, China RoHS	CB, CE, cTUVus, FCC-B, Canadian ICES-003-B, TUV/S, VCCI-B, CCC, EAC, RCM, RoHS, WEEE, China RoHS	TCO Displays 7, EPEAT Gold (US), TUV/Ergonomics, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, Canadian ICES- 003-B, TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC	TCO Displays 6.0, EPEAT Gold (US), TUV/Ergonomics, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, Canadian ICES- 003-B, TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC		
Warranty		Two Years ¹	Two Years ¹	Two Years ¹	Two Years ¹	Five Years ²	Five Years ²		
Dimensions (Unit: mm)									

¹ Product is warranted for 24-hour use over the period of two years.

² Free from bright sub-pixels for 6 months from the date of purchase.

³ HDCP 2.2 is not supported.

With current LCD technology, a panel may contain a limited number of missing or flickering pixels.

		Analog Input Monitors		Touch Panel Monitors	
		DuraVision FDS1903	DuraVision FDS1703	DuraVision FDF2382WT	DuraVision FDS1782T
Panel	Type	TN	TN	IPS	IPS
	Backlight	LED	LED	LED	LED
	Size	19" / 48 cm	17" / 43 cm	23" / 58 cm	17" / 43 cm
	Native Resolution	1280 x 1024 (5:4 aspect ratio)	1280 x 1024 (5:4 aspect ratio)	1920 x 1080 (16:9 aspect ratio)	1280 x 1024 (5:4 aspect ratio)
	Viewable Image Size (H x V)	376.3 x 301 mm	337.9 x 270.3 mm	509.2 x 286.4 mm	337.9 x 270.3 mm
	Pixel Pitch	0.294 x 0.294 mm	0.264 x 0.264 mm	0.265 x 0.265 mm	0.264 x 0.264 mm
	Grayscale Tones	256 tones (a palette of 1021)	256 tones (a palette of 1021)	256 tones (a palette of 1021)	256 tones (a palette of 1021)
	Display Colors	16.7 million (a palette of 1.06 billion)	16.7 million (a palette of 1.06 billion)	16.7 million (a palette of 1.06 billion)	16.7 million (a palette of 1.06 billion)
	Viewing Angles (H / V, typical)	170°, 160°	160°, 140°	178°, 178°	178°, 178°
	Brightness (typical)	350 cd/m ²	350 cd/m ²	260 cd/m ²	350 cd/m ²
Contrast Ratio (typical)	1000:1	800:1	1000:1	1000:1	
Response Time (typical)	5 ms (black-white-black)	30 ms (black-white-black)	11 ms (gray-to-gray)	11 ms (gray-to-gray)	
Touch Panel	Type	-	-	Projected Capacitive	Projected Capacitive
	Communication Protocol	-	-	USB	USB
	Touch Life	-	-	50 million touches (minimum)	50 million touches (minimum)
	Surface Hardness	-	-	5H	5H
	Compatible OS	-	-	Windows 10 (64-bit, 32-bit) Windows 8.1 (64-bit, 32-bit) Windows 7 (64-bit, 32-bit)	Windows 10 (64-bit, 32-bit) Windows 8.1 (64-bit, 32-bit) Windows 7 (64-bit, 32-bit)
Video Signals	Input Terminals	PC: D-Sub mini 15 pin AV: BNC (Composite)	PC: D-Sub mini 15 pin AV: BNC (Composite)	D-Sub mini 15 pin, DVI-D 24 pin (with HDCP), DisplayPort (with HDCP)	D-Sub mini 15 pin, DVI-D 24 pin (with HDCP), DisplayPort (with HDCP)
	Digital Scanning Frequency (H / V)	-	-	DVI: 31 - 64 kHz, 59 - 61 Hz (VGA Text: 69 - 71 Hz) DisplayPort: 31 - 68 kHz, 59 - 61 Hz (VGA Text: 69 - 71 Hz)	31 - 64 kHz, 59 - 61 Hz (VGA Text: 69 - 71 Hz)
	Analog Scanning Frequency (H / V)	24.8 - 74.8 kHz, 56.2 - 75.1 Hz	24.8 - 74.8 kHz, 56.2 - 75.1 Hz	31 - 81 kHz, 55 - 76 Hz	31 - 81 kHz, 55 - 76 Hz
	Sync Formats	-	-	Separate	Separate
	Video Input Format	NTSC, PAL, SECAM	NTSC, PAL, SECAM	-	-
USB	Function	-	-	1 port for touch panel control 2-port USB	1 port for touch panel control 2-port USB
	Standard	-	-	USB 2.0	USB 2.0
Audio	Speakers	0.3 W + 0.3 W	0.5 W + 0.5 W	1.0 W + 1.0 W	1.0 W + 1.0 W
	Input Terminals	RCA	RCA	3.5 mm stereo jack	3.5 mm stereo jack
	Output Terminals	-	-	3.5 mm headphone jack	3.5 mm headphone jack
	Sound Adjustment	-	Volume	Volume, Power Save, Source (DisplayPort)	Volume, Power Save, Source (DisplayPort)
Power	Power Requirements	AC 100 - 120 V / 200 - 240 V, 50 / 60 Hz	AC 100 - 120 V / 200 - 240 V, 50 / 60 Hz	AC 100 - 120 V, 50 / 60 Hz	AC 100 - 240 V, 50 / 60 Hz
	Maximum Power Consumption	36 W	36 W	42 W	37 W
	Typical Power Consumption	-	-	14 W	10 W
	Power Save Mode	Less than 8 W	Less than 8 W	Less than 0.7 W	Less than 0.7 W
	Standby Mode	Less than 1.3 W	Less than 1 W	Less than 0.7 W	Less than 0.7 W
Features & Functions	Power Management	-	-	DVI DMPM, VESA DPM	DVI DMPM, VESA DPM
	Preset Modes	-	-	Color Mode (User1, User2, sRGB)	Color Mode (User1, User2, sRGB)
	Auto EcoView	-	-	-	-
Physical Specifications	Visibility Enhancement Technology	-	-	-	-
	Dimensions (Landscape, W x H x D)	405 x 406.5 - 506.5 x 205 mm	380 x 400 - 500 x 205 mm	556.7 x 143.9 - 353.9 x 216.3 - 401.3 mm	391.8 x 142.5 - 348 x 214.9 - 400.4 mm
	Dimensions (Portrait, W x H x D)	334 x 442 - 542 x 205 mm	353 x 430 - 530 x 205 mm	-	-
	Dimensions (Without Stand, W x H x D)	405 x 334 x 61.5 mm	380 x 353 x 58 mm	556.7 x 339.2 x 54 mm	391.8 x 331 x 54 mm
	Net Weight	6.1 kg / 13.4 lbs	5.9 kg / 13 lbs	6.6 kg / 14.5 lbs	4.8 kg / 10.6 lbs
	Net Weight (Without Stand)	4.3 kg / 9.5 lbs	4.1 kg / 9 lbs	6 kg / 13.2 lbs	4.3 kg / 9.5 lbs
	Height Adjustment Range	100 mm	100 mm	-	-
	Tilt	30° Up, 0° Down	30° Up, 0° Down	15° - 70°	15° - 70°
	Swivel	35°	35°	-	-
	Pivot	90°	90°	-	-
Environmental Requirements	Hole Spacing (VESA Standard)	100 x 100 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm
	Temperature	0 - 35 °C	0 - 35 °C	5 - 35 °C	5 - 35 °C
Certifications & Standards (Please contact EIZO for the latest information.)	Humidity (R.H., non condensing)	20 - 80%	20 - 80%	20 - 80%	20 - 80%
		CE, CB, cTUVus, FCC-A, Canadian ICES-003-A, TUV/S, VCCI-A, RoHS, WEEE, China RoHS, CCC, RCM, EAC	CE, CB, cTUVus, FCC-A, Canadian ICES-003-A, TUV/S, VCCI-A, RoHS, WEEE, China RoHS, CCC, RCM, EAC	CB, CE, cTUVus, FCC-B, CAN ICES-3 (B), VCCI-B, BSMI, CCC, RCM, EAC, RoHS, WEEE, China RoHS	CB (IEC60601-1), CB, CE, cTUVus, FCC-B, CAN ICES-3 (B), VCCI-B, BSMI, CCC, RCM, EAC, RoHS, WEEE, China RoHS
Warranty	Two Years ¹	Two Years ¹	Three Years	Three Years	
Dimensions (Unit: mm)					

¹ Product is warranted for 24-hour use over the period of two years.

² Free from bright sub-pixels for 6 months from the date of purchase.

³ HDCP 2.2 is not supported.

With current LCD technology, a panel may contain a limited number of missing or flickering pixels.

EIZO Corporation

153 Shimokashiwano, Hakusan, Ishikawa 924-8566 Japan

Phone +81-76-277-6792 Fax +81-76-277-6793

www.eizoglobal.com

All product names are trademarks or registered trademarks of their respective companies.
DuraVision, FlexScan, and EIZO are registered trademarks of EIZO Corporation.
Specifications are subject to change without notice.

Copyright © 2017 EIZO Corporation. All rights reserved.
Printed in Japan, 9, 2017, 4K (160808d)