

Product Highlights

Complete Day/Night Surveillance Solution

Keep watch over an area 24 hours a day with built-in night vision; the IR LEDs and automatic IR cut filter give you a clear picture, even in complete darkness

Sound and Motion Detection

Never miss an important moment with sound and motion detection that can send notifications with snapshots right to your e-mail inbox

mydlink Cloud Service Enabled Device

Stay connected to everything you love from anywhere, anytime; mydlink service provides peace of mind when you're away from your home or office



DCS-932L

Wireless N Day/Night Network Camera

Features

Camera

- High quality VGA CMOS sensor for excellent image quality
- Built-in IR LEDs to capture video in low-light environments, or even complete darkness

Security

- Motion detection with configurable detection windows
- Sound level detection
- Send notifications and snapshots to your e-mail address

Ease Of Use

- Wireless 802.11n/g/b connection lets you install the camera anywhere
- WPS support for easy wireless connection
- UPnP & DDNS support

mydlink Functionality

- mydlink enabled so you can check on your camera anytime, anywhere
- View and manage your camera through the mydlink website
- Supports the mydlink Lite and mydlink+ apps for remote viewing on your mobile device

The DCS-932L Wireless N Day/Night Network Camera is a complete surveillance solution for your home or small office. The built-in night vision gives you 24 hour surveillance complete with motion and sound detection. It's mydlink enabled too, so you can check on your camera anytime, anywhere from any PC, tablet, or mobile phone.

Peace Of Mind With 24/7 Monitoring Of Any Environment

The DCS-932L is a standalone surveillance camera that requires no special hardware or software, and can run independently even without a PC. Send e-mail notifications with snapshots whenever motion or sound is detected using just the DCS-932L and an Internet connection. You can customize areas of the video to monitor for motion to keep watch over entryways, and you can set volume limits to detect when a loud sound is picked up by the camera. Night time monitoring is possible with the built-in infrared LEDs which allow for night time viewing of up to 5 meters, enabling round-the-clock monitoring of a home or small office.

Instant Anywhere Access With mydlink Cloud Service

Enhanced with mydlink™ support, the DCS-932L makes it easier and more convenient for you to look after your family and home or office environment. With a mydlink service enabled camera, you can stay connected to everything you love from anywhere, anytime. Access your camera through the mydlink website or the mydlink mobile app that lets you view and manage your camera through your tablet or mobile phone, no matter where you are.


Create a Comprehensive Surveillance System

Included with the DCS-932L is the D-ViewCam software, which adds enhanced features and functionality that helps you create a full surveillance system. D-ViewCam enables centralized management of multiple network cameras, supporting up to 32 network cameras and up to 64 users. With a dedicated computer it offers digital monitoring and recording with a wide array of features, including scheduled, motion and manual recording options for individual needs.

Front View



Back View

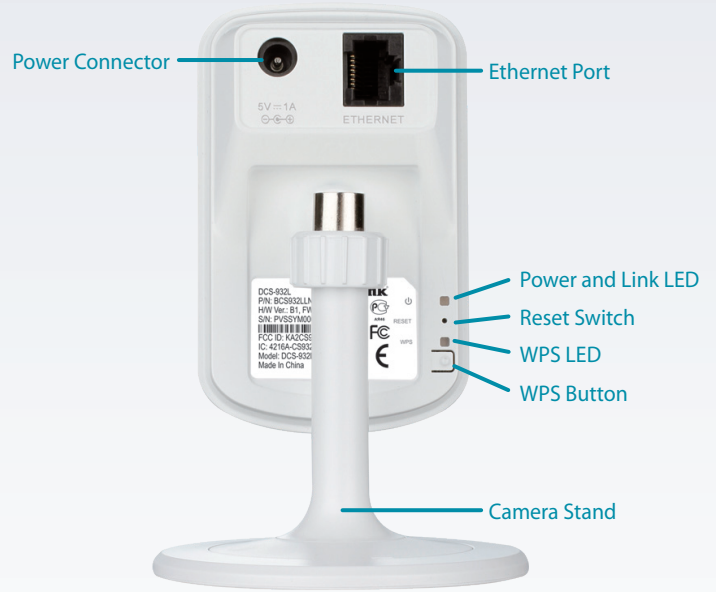

Technical Specifications

Camera

Camera Hardware Profile	<ul style="list-style-type: none"> • 1/5"VGA progressive CMOS sensor • Fixed length 3.15 mm • Aperture F2.8 • Angle of view <ul style="list-style-type: none"> • (H) 45.3° • (V) 34.5° • (D) 54.9° 	<ul style="list-style-type: none"> • Exposure Time: 1/3.75 to 1/14,640 sec. • 4X digital zoom • Minimum object distance: 500 mm • Built-in microphone • 5 meter IR illumination distance • Minimum illumination: 0 lux with IR LEDs on • Built-in Infrared-Cut Removable (ICR) Filter module
Image Features	<ul style="list-style-type: none"> • Configurable image size, quality, and frame rate • Time stamp and text overlays 	<ul style="list-style-type: none"> • Configurable motion detection windows • Configurable brightness, saturation, contrast
Video Compression	<ul style="list-style-type: none"> • MJPEG format compression 	<ul style="list-style-type: none"> • JPEG for still images
Video Resolution	<ul style="list-style-type: none"> • 640 x 480 at 20 fps 	<ul style="list-style-type: none"> • 320 x 240 / 160 x 112 at 30 fps
Audio	<ul style="list-style-type: none"> • PCM 	
Connectivity	<ul style="list-style-type: none"> • 10/100 BASE-TX Ethernet port • 802.11n/b/g wireless with WEP/WPA/WPA2 encryption • Operates over 2.4 GHz frequency band 	<ul style="list-style-type: none"> • Single-band 1T1R mode supports a maximum data rate of 72.2 Mbps (PHY rate) using 20 MHz bandwidth

Network

Network Protocols	<ul style="list-style-type: none"> • IPv4 • ARP • TCP • UDP • ICMP • DHCP Client • NTP Client (D-Link) • DNS Client 	<ul style="list-style-type: none"> • DDNS Client (D-Link) • SMTP Client • FTP Client • HTTP Server • PPPoE • UPnP Port Forwarding • LLTD
Security	<ul style="list-style-type: none"> • Password authentication 	<ul style="list-style-type: none"> • HTTP digest encryption

DCS-932L Wireless N Day/Night Network Camera

System Integration	
System Requirements for Web Interfaces	<ul style="list-style-type: none"> Operating system: Microsoft Windows 8/7/Vista or Mac OS X 10.6 or higher Browser: Internet Explorer 7, Firefox 12, Safari 6, or Chrome 20 or higher with Java installed and enabled
Event Management	<ul style="list-style-type: none"> Motion detection Sound level detection Event notification and sending snapshots via SMTP
Remote Management	<ul style="list-style-type: none"> Configuration accessible via web browser
Mobile support	<ul style="list-style-type: none"> mydlink Lite app for iPhone/iPad/iPod touch, Android, and Windows Phone
D-ViewCam™ System Requirements	<ul style="list-style-type: none"> Operating System: Microsoft Windows 8/7/Vista/XP Web Browser: Internet Explorer 7 or higher
D-ViewCam™ Software Functions	<ul style="list-style-type: none"> Remote management/control of up to 32 cameras Viewing of up to 32 cameras on one screen Supports all management functions provided in web interface Scheduled motion triggered, or manual recording options
General	
Dimensions	<ul style="list-style-type: none"> Camera only: 60 x 32.15 x 96 mm (2.36 x 1.27 x 3.78 in.) With base: 80 x 80 x 126.6 mm (3.15 x 3.15 x 4.98 in.)
Weight	<ul style="list-style-type: none"> Camera only: 57.8 grams (2.04 ounces) ± 5% With base: 91.8 grams (3.24 ounces) ± 5%
Power	<ul style="list-style-type: none"> 5 V DC 1 A, 50/60 Hz
Power Consumption	<ul style="list-style-type: none"> 2.84 watts maximum ± 5%
Temperature	<ul style="list-style-type: none"> Operating: 0 to 40 °C (32 to 104 °F) Storage: -20 to 70° C (-4 to 158 °F)
Humidity	<ul style="list-style-type: none"> Operating: 20% to 80% non-condensing Storage: 5% to 95% non-condensing
Certifications	<ul style="list-style-type: none"> CE FCC Class B IC C-Tick
Dimensions Diagram	

Updated 2014/09/15